




CLASS 300 STAINLESS STEEL BALL VALVE/FLANGED

Two Piece/Split Body • Full Port • Stainless Steel Trim • Hypatite Seats
CAPI/ISO5211 Mounting Pad

KITZ Corporation Of America
800-772-0073 • www.KITZ.com



300UTBZM (C) 300UTBZM-FS (C)

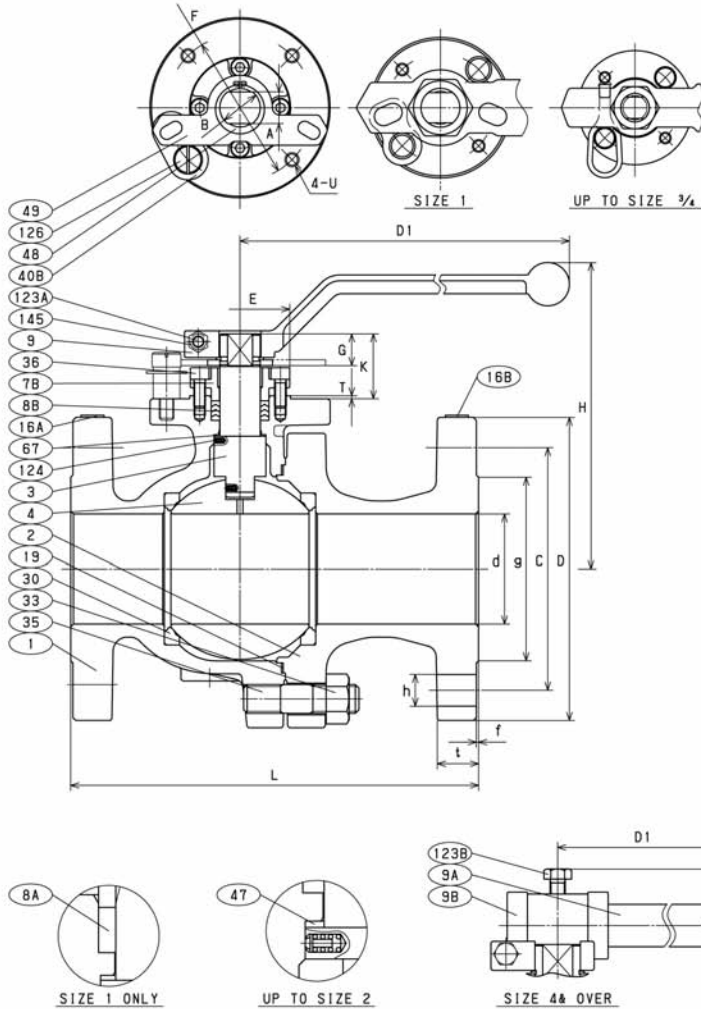

MATERIAL LIST

No.	Name of Parts	Materials
1	BODY	A351 Gr. CF8M
2	BODY CAP	A351 Gr. CF8M
3	STEM	A276 TYPE 316
4	BALL	A351 Gr. CF8M or A276 TYPE 316
7A	GLAND	A276 TYPE 316 (UP TO SIZE 1)
7B	GLAND	A351 Gr. CF8 (SIZE 1 1/2 & OVER)
8A	GLAND PACKING	300UTBZM (C) PTFE (SIZE 1 ONLY) 300UTBZM-FS (C) FLEXIBLE GRAPHITE
8B	GLAND PACKING	300UTBZM (C) PTFE (EXCEPT FOR SIZE 1) 300UTBZM-FS (C) FLEXIBLE GRAPHITE
9	HANDLE	STAINLESS STEEL (UP TO SIZE 1) DUCTILE IRON (SIZE 1 1/2-3)
9A	HANDLE BAR	CARBON STEEL (SIZE 4 & OVER)
9B	HANDLE HEAD	DUCTILE IRON (SIZE 4 & OVER)
10	HANDLE NUT	STAINLESS STEEL (UP TO SIZE 1)
16A	NAME PLATE	STAINLESS STEEL
16B	LEV PLATE	STAINLESS STEEL
19	GASKET	300UTBZM (C) PTFE 300UTBZM-FS (C) FLEXIBLE GRAPHITE
30	BALL SEAT	HYPATITE PTFE
33	CAP NUT	A194 Gr. 8M
34	GLAND NUT	STAINLESS STEEL (UP TO SIZE 1)
35	CAP BOLT	A193 Gr. 8BM
36	GLAND BOLT	A193 Gr. 8BM
40A	LOCK PLATE	STAINLESS STEEL (UP TO SIZE 1)
40B	KEY LOCK PLATE	STAINLESS STEEL
43	CONED DISC SPRING	STAINLESS STEEL (UP TO SIZE 1)
47	THRUST WASHER	C/F PTFE (SIZE 1/2 & 3/4) G/F PTFE (SIZE 1-2)
48	SNAP RING	STAINLESS STEEL (SIZE 1 1/2 & OVER)
49	STOPPER	STAINLESS STEEL (SIZE 1 1/2 & OVER)
67	STEM BEARING	G/F PTFE (SIZE 3 & OVER)
123A	HANDLE BOLT	STAINLESS STEEL (SIZE 1 1/2 & OVER)
123B	HANDLE BOLT	STAINLESS STEEL (SIZE 4 & OVER)
124	SPRING & PIN	STAINLESS STEEL
126	STOPPER PIN	STAINLESS STEEL
145	SPRING WASHER	STAINLESS STEEL (SIZE 1 1/2 & OVER)
155	SPACER	300UTBZM-FS (C) REINFORCED PTFE (UP TO SIZE 1)

DIMENSIONS

Unit : inch

Nominal Size	End Flange											Mounting Dimensions for Actuator										ISO 5211 Flange Type
	in.	mm	d	H	D1	L	D	Bolt Hole		Bolt Size	g	t	f	A	B	E	F	G	K	T	U	
1/2	15	0.55	4.53	6.30	5.50	3.75	2.62	4	0.62	1/2	1.38	0.56	0.06	0.355	0.473	0.985	1.417	0.39	0.85	0.06	1/4-20UNC	F03
3/4	20	0.75	4.72	6.30	6.00	4.62	3.25	4	0.75	5/8	1.69	0.62	0.06	0.355	0.473	0.985	1.417	0.39	0.85	0.06	1/4-20UNC	F03
1	25	0.95	5.28	7.09	6.50	4.88	3.50	4	0.75	5/8	2.00	0.69	0.06	0.552	0.709	1.378	1.969	0.55	1.26	0.08	1/4-20UNC	F05
1 1/2	40	1.50	5.63	9.06	7.50	6.14	4.50	4	0.88	3/4	2.88	0.81	0.06	0.670	0.867	2.166	2.756	0.67	1.34	0.08	5/16-18UNC	F07
2	50	1.97	5.98	9.06	8.50	6.50	5.00	8	0.75	5/8	3.62	0.88	0.06	0.670	0.867	2.166	2.756	0.67	1.34	0.08	5/16-18UNC	F07
2 1/2	65	2.52	8.11	15.75	9.50	7.50	5.88	8	0.88	3/4	4.12	1.00	0.06	0.867	1.103	2.756	4.016	0.87	1.77	0.08	3/8-16UNC	F10
3	80	3.00	8.39	15.75	11.12	8.25	6.62	8	0.88	3/4	5.00	1.12	0.06	0.867	1.103	2.756	4.016	0.87	1.77	0.08	3/8-16UNC	F10
4	100	3.94	10.08	29.50	12.00	10.00	7.88	8	0.88	3/4	6.19	1.25	0.06	1.063	1.418	3.347	4.921	1.06	1.97	0.08	1/2-13UNC	F12
6	150	5.95	12.60	39.37	15.88	12.50	10.62	12	0.88	3/4	8.50	1.44	0.06	1.418	1.890	3.937	5.512	1.42	2.48	0.08	5/8-11UNC	F14
8	200	7.95	16.34	59.06	19.75	15.00	13.00	12	1.00	7/8	10.62	1.62	0.06	1.811	2.362	5.118	6.496	1.81	3.07	0.08	3/4-10UNC	F16