


Class 150

LIFT CHECK VALVE

Pressure-Temperature Rating: ASME B 16.34

150UNA

150UNAM

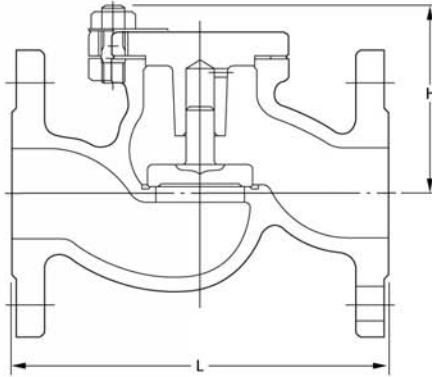

Materials

Parts	150UNA	150UNAM
Body	CF8	CF8M
Cover	CF8	CF8M
Disc	304	316
Gasket	Refer to Page 10	
Cover bolt/nut	B8/8	

*(T) Suffixing stands for the provision of ceramic filled PTFE gaskets.
Note: *Body seats and/or disc seats can be optionally hard-faced.
*Size 1 1/4 is only for 10K.



Items

Face-to-Face Dimensions	ASME B16.10
End Flange Dimensions	ASME B16.5
Wall Thickness	ASME B16.34 Class 150

Nominal Size	1/2		3/4		1		1 1/2	
	in.	mm	in.	mm	in.	mm	in.	mm
L	in.	4.25	4.62	5.00	6.50			
	mm	108	117	127	165			
H	in.	2.7	2.8	2.8	3.3			
	mm	68	70	70	83			