


10K

## LIFT CHECK VALVE

Pressure-Temperature Rating: JIS B2220

10UNA(T)

10UNAM(T)

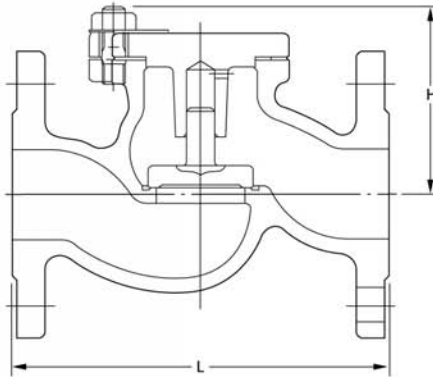

### Materials

Parts	10UNA(T)*	10UNAM(T)*
Body	SCS13A	SCS14A
Cover	SCS13A	SCS14A
Disc	SUS304	SUS316
Gasket	Refer to Page 10	
Cover bolt/nut	SUS304/304	

\* (T) Sufficing stands for the provision of ceramic filled PTFE gaskets.

Note: \* Body seats and/or disc seats can be optionally hard-faced.

\* Size 1 1/4 is only for 10K.



### Items

Face-to-Face Dimensions	ASME B16.10
End Flange Dimensions	JIS B2220
Wall Thickness	ASME B16.34 Class 150

Nominal Size	1/2		3/4		1		1 1/4		1 1/2	
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
L	in.	4.25	4.62	5.00	5.50	6.50				
	mm	108	117	127	140	165				
H	in.	2.7	2.8	2.8	3.1	3.3				
	mm	68	70	70	80	83				