


10K

## JACKETED LIFT CHECK VALVE

Pressure-Temperature Rating: JIS B2220

10UNAJ

10UNAJM

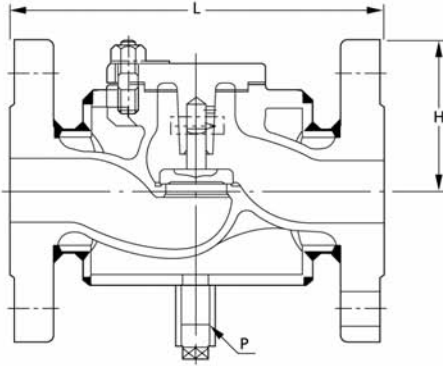

### Materials

Parts	10UNAJ	10UNAJM
Body	SCS13A	SCS14A
Cover	SCS13A	SCS14A
Disc	SUS304	SUS316
Gasket	Refer to Page 10	
Cover bolt/nut	SUS304/304	
Jacket*	STPG370+SS400	

\*The material may be changed depending on the service temperature.  
Note: Body seats and/or disc seats can be optionally hard-faced.



### Items

Face-to-Face Dimensions	KITZ Std.
End Flange Dimensions	JIS B2220
Wall Thickness	ASME B16.34 Class 150

Unit:mm

Nominal Size	$\frac{1}{2} \times 1\frac{1}{2}$ 15×40	$\frac{3}{4} \times 1\frac{1}{2}$ 20×40	1×2 25×50	$1\frac{1}{2} \times 2\frac{1}{2}$ 40×65
L	156	156	190	214
H	73	73	73	90
P	Rc $\frac{1}{2}$	Rc $\frac{1}{2}$	Rc $\frac{1}{2}$	Rc $\frac{1}{2}$

\*The nominal sizes are indicated by [the valve nominal sizes] and [flange nominal sizes].