


20K

JACKETED LIFT CHECK VALVE

Pressure-Temperature Rating: JIS B2220

20UNAJ

20UNAJM

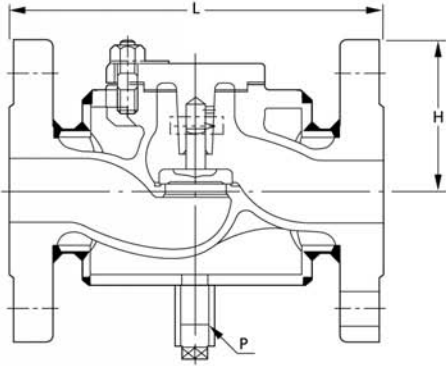

Materials

Parts	20UNAJ	20UNAJM
Body	SCS13A	SCS14A
Cover	SCS13A	SCS14A
Disc	SUS304	SUS316
Gasket	Refer to Page 10	
Cover bolt/nut	SUS304/304	
Jacket*	STPG370+SS400	

*The material may be changed depending on the service temperature.
Note: Body seats and/or disc seats can be optionally hard-faced.



Items	
Face-to-Face Dimensions	KITZ Std.
End Flange Dimensions	JIS B2220
Wall Thickness	ASME B16.34 Class 300

Nominal Size	$1/2 \times 1/2$	$3/4 \times 1/2$	1 × 2	$1 1/2 \times 2 1/2$
	15 × 40	20 × 40	25 × 50	40 × 65
L	160	160	194	218
H	73	73	73	90
P	Rc $1/2$	Rc $1/2$	Rc $1/2$	Rc $1/2$

Unit:mm

*The nominal sizes are indicated by [the valve nominal sizes] and [flange nominal sizes].